

# Smart Mini DC UPS

Keep Wi-Fi Power On

KP3 Series



AC ⇌ DC  
0 ms Transfer



V-0 Flame-retardant  
Plastic Enclosure




Overcharge & Overdischarge  
Protection

## FEATURES

- 0ms transfer technology keeps your devices working when electricity is ON / OFF shifting.
- With wall-mount slots on the back, KP3 Series can be mounted on wall easily.
- Air cooling system provides maximum heat dissipation, ensuring the long-term stability of UPS.
- V-0 flame retardant product housing secures you and your property.
- 10000mAh high-capacity battery provides longer backup time.
- 36W high-power output (KP3 Pro) provides better compatibility.

## TYPICAL APPLICATION SCENARIO

Power up two devices with different voltage

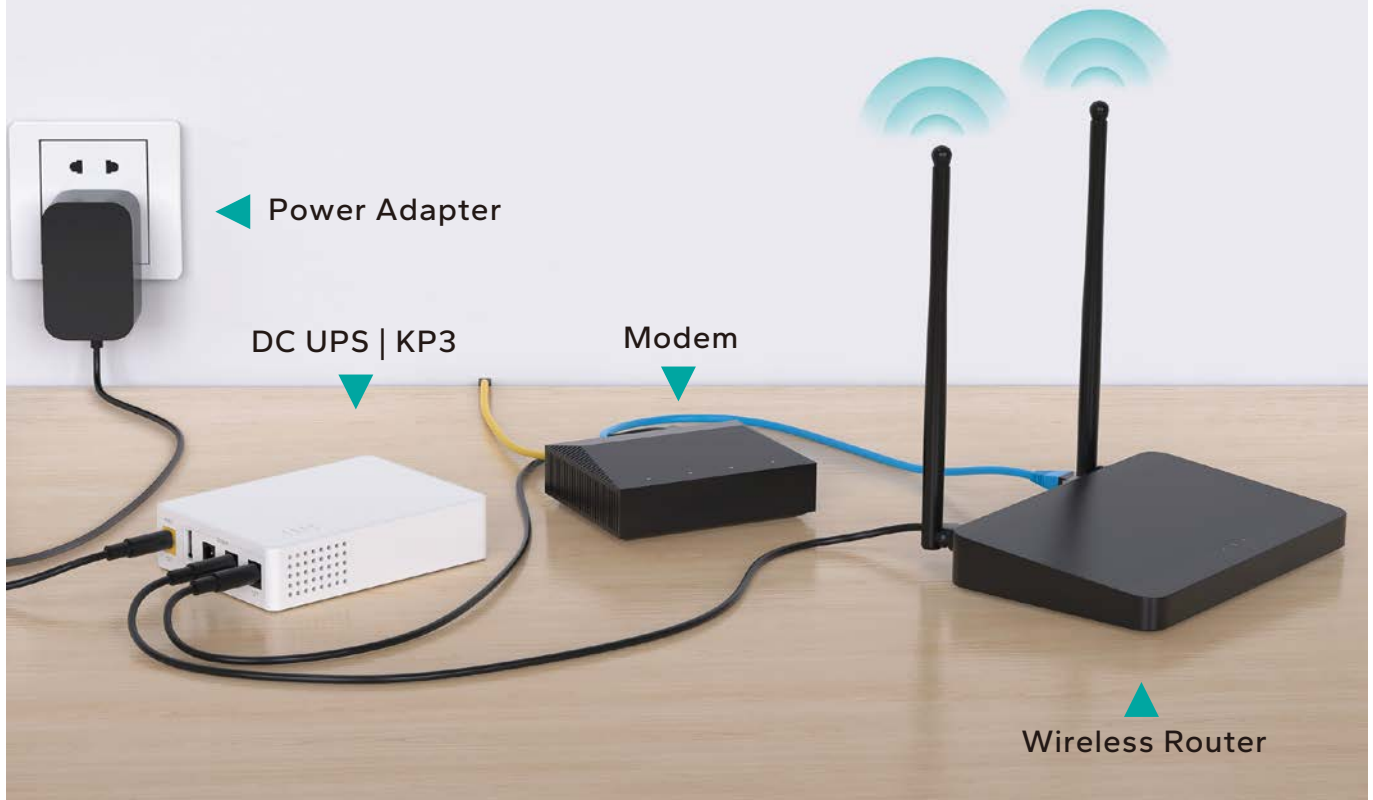

## SPECIFICATIONS

| Model               |              | KP3S                    | KP3           | KP3 Pro       |
|---------------------|--------------|-------------------------|---------------|---------------|
| Battery Capacity    |              | 36Wh                    |               |               |
| Battery             |              | Lithium-ion             |               |               |
|                     |              | 3.6V / 2500mAh * 4      |               |               |
| Enclosure Material  |              | ABS+PC                  |               |               |
| Input               |              | DC 12V / 2.0A           | DC 12V / 2.0A | DC 12V / 4.0A |
| Output              | DC1          | 12V / 1.5A              | 12V / 1.5A    | 12V / 3.0A    |
|                     | DC2          | -                       | 9V / 2.0A     | 9V / 1.0A     |
|                     | DC3          | -                       | 5V / 2.0A     | 5V / 2.0A     |
|                     | USB          | -                       | 5V / 2.0A     | 5V / 2.0A     |
| Total Output        |              | 18W (Max.)              | 18W (Max.)    | 36W (Max.)    |
| Net Weight (g)      |              | 274                     | 282           | 293           |
| Unit Dimension (mm) |              | 115 * 83 * 27 (L*W*H)   |               |               |
| Operate Temperature | UPS Mode     | 0°C – 40°C              |               |               |
|                     | Battery Mode | -15°C – 50°C            |               |               |
| Operate Humidity    |              | Less than 75%RH         |               |               |
| Storage             |              | 15°C – 35°C, 40 – 75%RH |               |               |