

Smart Mini DC UPS

Keep Wi-Fi Power On

KP5 Series



AC $\rightleftharpoons$ DC
0ms Transfer



Multi-output
3*DC + 1*USB-A + 1*USB-C



Overcharge &
Overdischarge Protection




V-0 Flame-retardant
Plastic Enclosure

FEATURES

- 0ms transfer technology keeps your devices working when electricity is ON / OFF shifting.
- With wall-mount slots on the back, KP4 Series can be mounted on wall easily.
- Air cooling system provides maximum heat dissipation, ensuring the long-term stability of UPS.
- V-0 flame retardant product housing secures you and your property.
- High-capacity battery provides longer backup time.
- 18W or 36W high-power output provides better compatibility.

TYPICAL APPLICATION SCENARIO

Powering up CCTV Cameras, NVR, LCD Monitor and Wireless Router

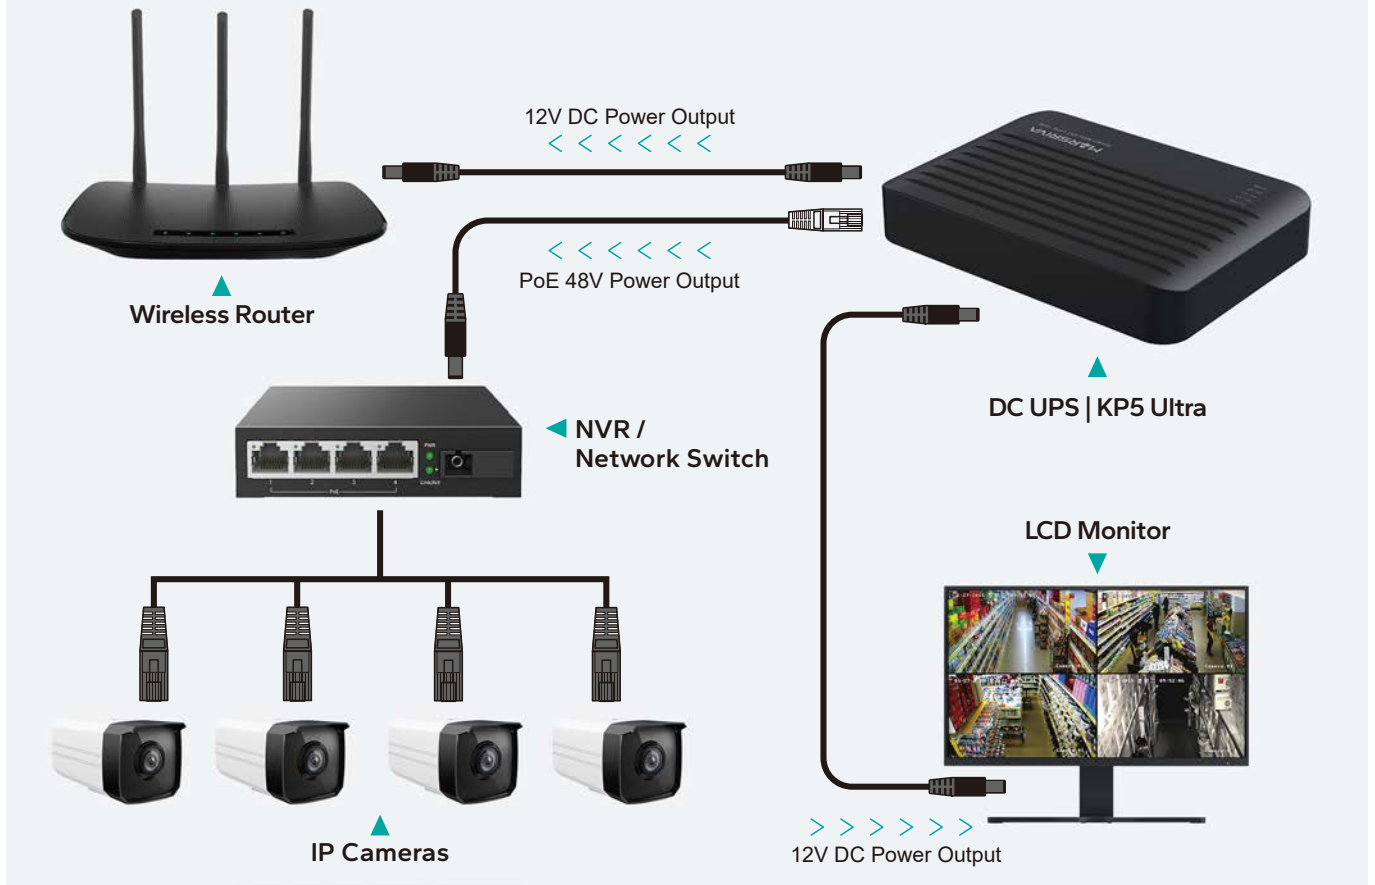

SPECIFICATIONS

Model		KP5	KP5 Plus	KP5 Pro	KP5 Ultra
Battery Capacity		32Wh (LiFePO4)	64Wh (LiFePO4)	32Wh (LiFePO4)	64Wh (LiFePO4)
Battery		3.2V / 10000mAh	3.2V / 20000mAh	3.2V / 10000mAh	3.2V / 20000mAh
		(5000mAh*2)	(5000mAh*4)	(5000mAh*2)	(5000mAh*4)
Enclosure Material		ABS+PC			
Input			100VAC–240VAC / 50Hz–60Hz		
Output		PoE: 24V / 0.75A		PoE: 24V / 1.5A or 48V / 0.75A	
		DC1: 12V / 1.5A		DC1: 12V / 3.0A	
		DC2: 12V / 1.5A		DC2: 12V / 3.0A	
		DC3: 9V / 2.0A	USB-A: 5V / 2.4A	DC3: 9V / 2.0A	USB-A: 5V / 2.4A
		DC4: 5V / 2.4A	USB-C: 5V / 2.4A	DC4: 5V / 2.4A	USB-C: 5V / 2.4A
Total Output		18W (Max.)	18W (Max.)	36W (Max.)	36W (Max.)
Net Weight (g)		355	495	325	498
Unit Dimension (mm)		180 * 125 * 35 (L*W*H)			
Operate Temperature	UPS Mode	0℃ – 40℃			
	Battery Mode	-15℃ – 50℃			
Operate Humidity		Less than 75%RH			
Storage		15℃ – 35℃, 40 – 75%RH			