

Smart Mini DC UPS

Security Never Shuts Down

KP9 Series



Multi-output
Ports



PoE
Supported



LiFePO4
Battery



Digital
LCD Display




Overcharge &
Overdischarge Protection

FEATURES

- Charge NVR / Network Switch at 48V / 2.0A or 53V / 1.8A DC Output
- Charge laptop at 14V / 4.0A or 16V / 4.0A or 19V / 4.0 or 24V / 4.0A with KP9 Pro
- High power budget, 100 watts max total output power
- Gigabit PoE ensures lightning-fast data transfer
- LiFePO4 batteries provide a longer product lifespan
- Intelligent circuit design with overcharge, overdischarge and short circuit protections
- Multi-function LCD display, showing the accurate power status
- Wide AC input voltage range (100 - 240 VAC)

TYPICAL APPLICATION SCENARIO

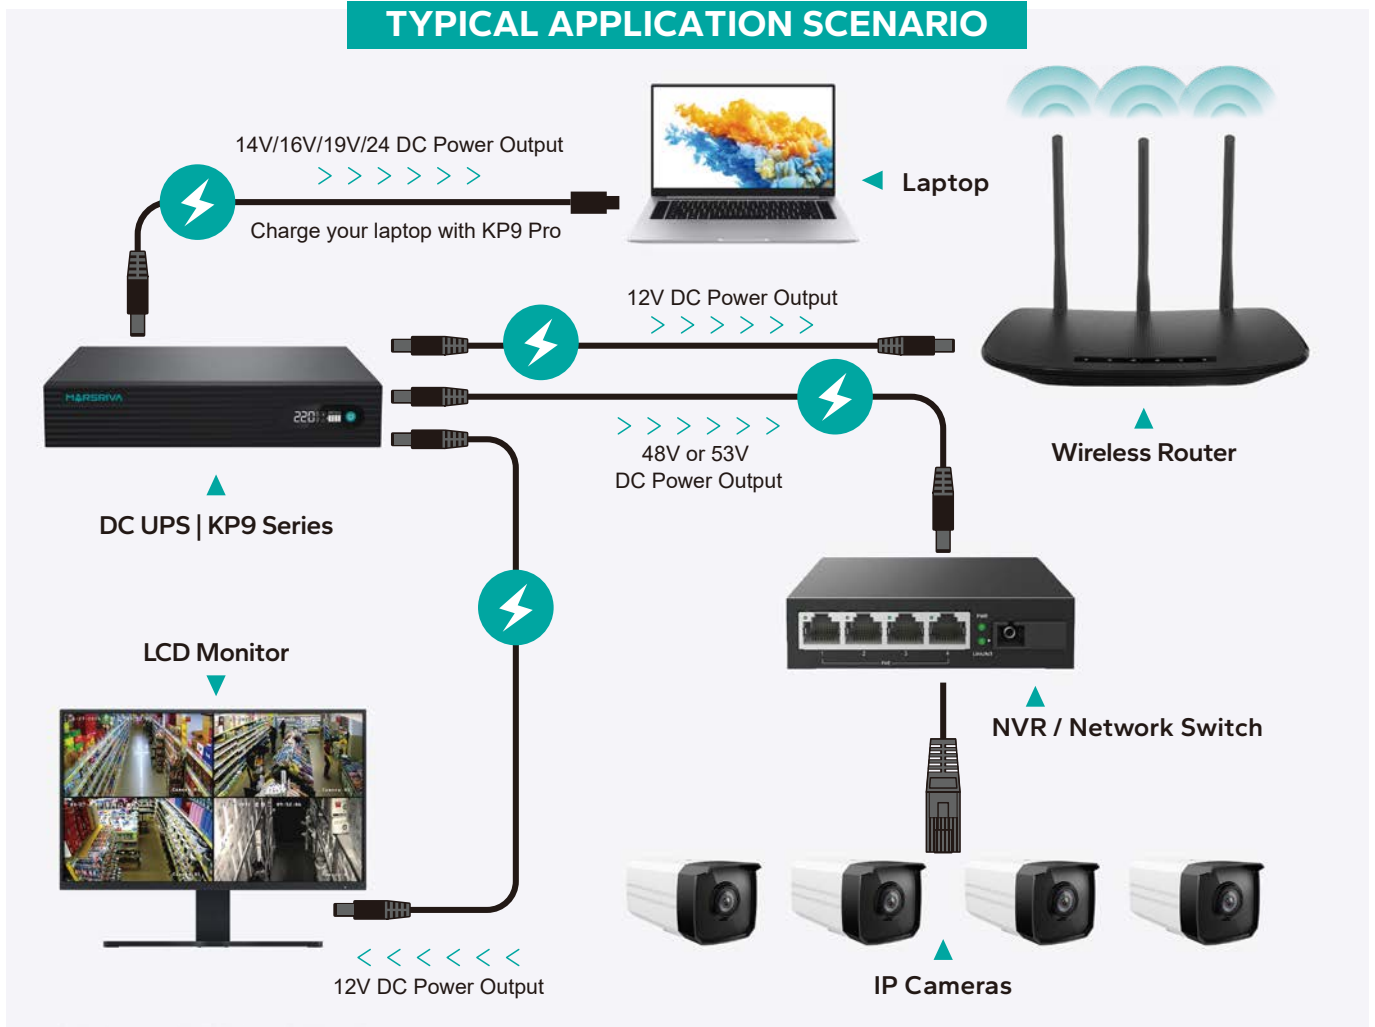

SPECIFICATIONS

Model	KP9	KP9 Pro
Battery Capacity	76.8Wh	
Battery	LiFePO4	
	3.2V / 6000mAh*4	
Enclosure Material	Metal	
Input	100 – 240VAC / 50 – 60Hz	
Output	1 * Gigabit PoE: 24V / 1.0A or 48V / 0.7A 2 * DC: 48V / 2.0A 1 * DC: 9V / 3.0A or 12V / 3.0A 7 * DC: 12V / 5.0A 1 * DC: 5V / 2.0A 1 * USB: 5V / 2.0A	1 * Gigabit PoE: 24V / 1.0A or 48V / 0.7A 2 * DC: 48V / 2.0A or 53V / 1.8A 1 * DC: 14V / 16V / 19V / 24V 4.0A 1 * DC: 9V / 3.0A or 12V / 3.0A 7 * DC: 12V / 5.0A 1 * DC: 5V / 2.0A 1 * USB: 5V / 2.0A
Total Output	100W (Max.)	
Net Weight (kg)	1.88	1.95
Unit Dimension (mm)	258 * 220 * 53mm (L*W*H)	
Operate Temperature	UPS Mode	0°C – 40°C
	Battery Mode	-15°C – 50°C
Operate Humidity	Less than 75%RH	
Storage	15°C – 35°C, 40 – 75%RH	