

Mini Power Sation

Whenever you need power

MP6S



268.8Wh
Capacity



600W
Power Output



100W
DC Input



110V / 220V
AC Output



Pure
Sine Wave




LCD
Display

FEATURES

- 600W high-power output provides better compatibility.
- Iron phosphate-lithium power battery, more security
- Excellent BMS protection
- Support using under wide temperature range, 6000 cycle life
- Compact and portable
- Multiple output ports

Mini Power Station 600W

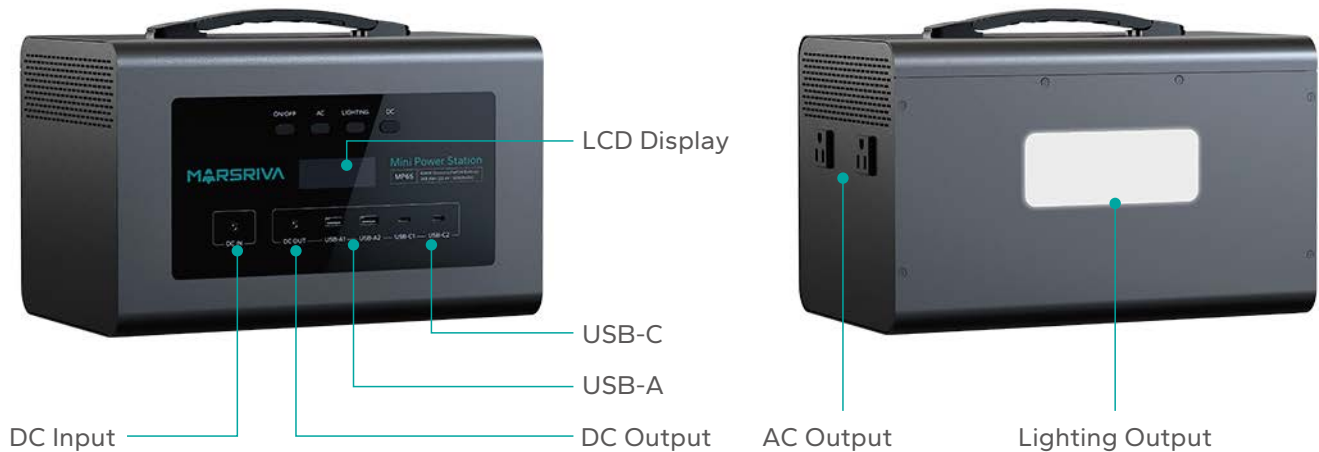

SPECIFICATIONS

GENERAL INFO

Model	MP6S
Rated Power	600W (Max.)
Battery Capacity	268.8Wh (22.4V / 12000mAh)
Battery Type	Lithium-iron Battery (LiFePO4)
Power Adapter Included	90W
Net Weight	6.5kg
Dimensions (L*W*H)	325 x 185 x 214.5mm

OUTPUT PORTS

AC Output	110VAC, 60Hz or 220VAC, 50Hz, 600W (Max.) Pure Sine Wave
DC 5521 Output	13V $\overline{\text{---}}$ 5.0A, 65W (Max.)
USB-A1 Output	5V $\overline{\text{---}}$ 3.0A / 9V $\overline{\text{---}}$ 2.0A / 12V $\overline{\text{---}}$ 1.5A, 18W (Max.)
USB-A2 Output	5V $\overline{\text{---}}$ 3.0A, 15W (Max.)
USB-C1 Output	5V $\overline{\text{---}}$ 3.0A, 15W (Max.)
USB-C2 Output	5V $\overline{\text{---}}$ 3.0A, 9V / 12V / 15V / 20V $\overline{\text{---}}$ 2.0A, 40W (Max.)
USB-(A2 + C1) Output	15W (Max.)
USB-(A1 + A2 + C1 + C2) Output	63W (Max.)
Lighting Output	2W

INPUT PORTS

DC 5521 Input	25VDC, 100W (Max.)
---------------	--------------------

ENVIRONMENTAL OPERATING TEMPERATURE

Charge Temperature	0°C to 45°C
Discharge Temperature	-10°C to 45°C

Specifications are subject to change without notice, and all product drawings are for reference only. Consult MARSRIVA for the latest design and specifications.